


COPPER IMPREGNATED GRAPHITE PRECISION GROUND BLANKS

Tolerance: +/- .0002" ALL SIX SIDES

Technical Specifications

| Grade | Color Identification | Shore Hardness | Flexural Strength (PSI) | Resistance (0.000 ohm/in.) | Particle Size (microns) |
|---------------|----------------------|----------------|-------------------------|----------------------------|-------------------------|
| POCO EDM-C200 | Green / White Stripe | 62 | 12,100 | 114 | 10 |
| POCO EDM-C3 | Orange | 66 | 20,300 | 127 | <5 |
| TTK-4C | Yellow | 60 | 15,500 | 100 | 4 |

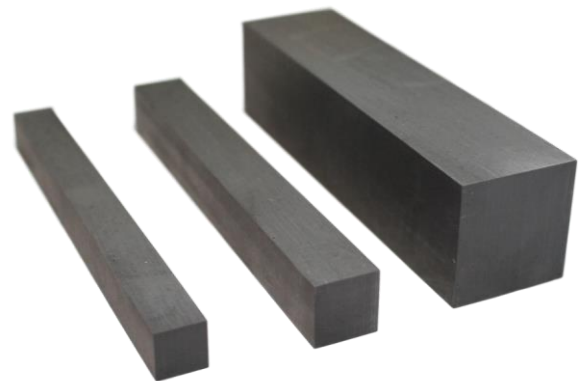

**Copper Impregnated Graphite – [Learn More](#)*

Order any custom size or tolerance

| Size (Inch) | | | Catalog No. | | |
|-------------|--------|--------|-------------|---------------|-------------|
| Width | Length | Height | TTK-4C | POCO EDM-C200 | POCO EDM-C3 |
| .250" | .250" | 3.000" | GCB320 | G2B320 | GYB320 |
| .375" | .375" | 3.000" | GCB330 | G2B330 | GYB330 |
| .500" | .500" | 3.000" | GCB340 | G2B340 | GYB340 |
| .750" | .750" | 3.000" | GCB360 | G2B360 | GYB360 |
| 1.000" | 1.000" | 3.000" | GCB380 | G2B380 | GYB380 |
| .250" | .250" | 4.000" | GCB420 | G2B420 | GYB420 |
| .375" | .375" | 4.000" | GCB430 | G2B430 | GYB430 |
| .500" | .500" | 4.000" | GCB440 | G2B440 | GYB440 |
| .750" | .750" | 4.000" | GCB460 | G2B460 | GYB460 |
| 1.000" | 1.000" | 4.000" | GCB480 | G2B480 | GYB480 |